


# Installation

## XP-BANZAI

- **Installation Time:** About 20 minutes
  - **Tools Required:** 1/4" Nut-driver, Phillips screwdriver
1. Unplug the AC power from your pinball machine. Remove game backglass.
  2. Open the backbox, and remove the original display board (D-12146) and the attached driver board (D-10877).
  3. Connect all cables leading from the head to the display driver board.
  4. It is recommended that you remove the High Voltage fuse from your power supply, as it is no longer needed.
  5. Attach the Foam Light-Blocks on their respective LED displays.
  6. The optional grey vinyl is easily installed at this time.
  7. Double-check all connections, plug in the machine, and turn the game on. The LEDs will light up. Pressing the **TEST** pushbutton on the XP-WMS10877 board will illuminate all segments of all displays. This indicates that all boards and cables in the **XPin™** System are operating correctly. Use the thumbwheel **BRIGHTNESS** control on the board to set your preferred illumination level.
  8. PLAY PINBALL! You'll enjoy your **XPin™** displays for years to come!

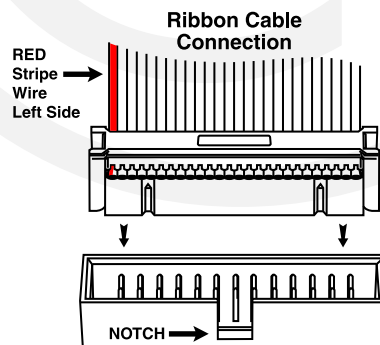

.....  
**EVOLUTION \* EVOLVED.**  
.....